



2027 SCOTT STRIKE MANUAL

CONTENT

THE STRIKE SHOULD BE ADJUSTED EXACTLY TO THE RIDER FOR MAXIMUM SAFETY AND RIDEABILITY.

This manual provides a summary of the primary operating functions of the Strike. It is not intended to serve as a comprehensive guide for service or maintenance procedures.

For detailed assistance, please consult an authorized SCOTT dealer to help prevent any technical issues, damage or harm.

GEOMETRY	03
TECHNICAL DATA	04
INSERTING THE BATTERY / MOUNTING BATTERY COVER	05
CABLE ROUTING OVERVIEW	06
REAR LIGHT	07
ADJUSTING THE CHAIN GUIDE	08
SETTING SAG	09
GENERAL SPARE PARTS	10
MANUFACTURE'S GUARANTEE	14

LEGEND



TORQUE AMOUNT



TORX TOOL SIZE



HEX TOOL SIZE



GREASE REQUIRED



NO GREASE REQUIRED



CARBON GREASE



THREADLOC REQUIRED



BEARING FIT REQUIRED




ANTI-SEIZE



REVERSE THREAD

STRIKE

GEOMETRY

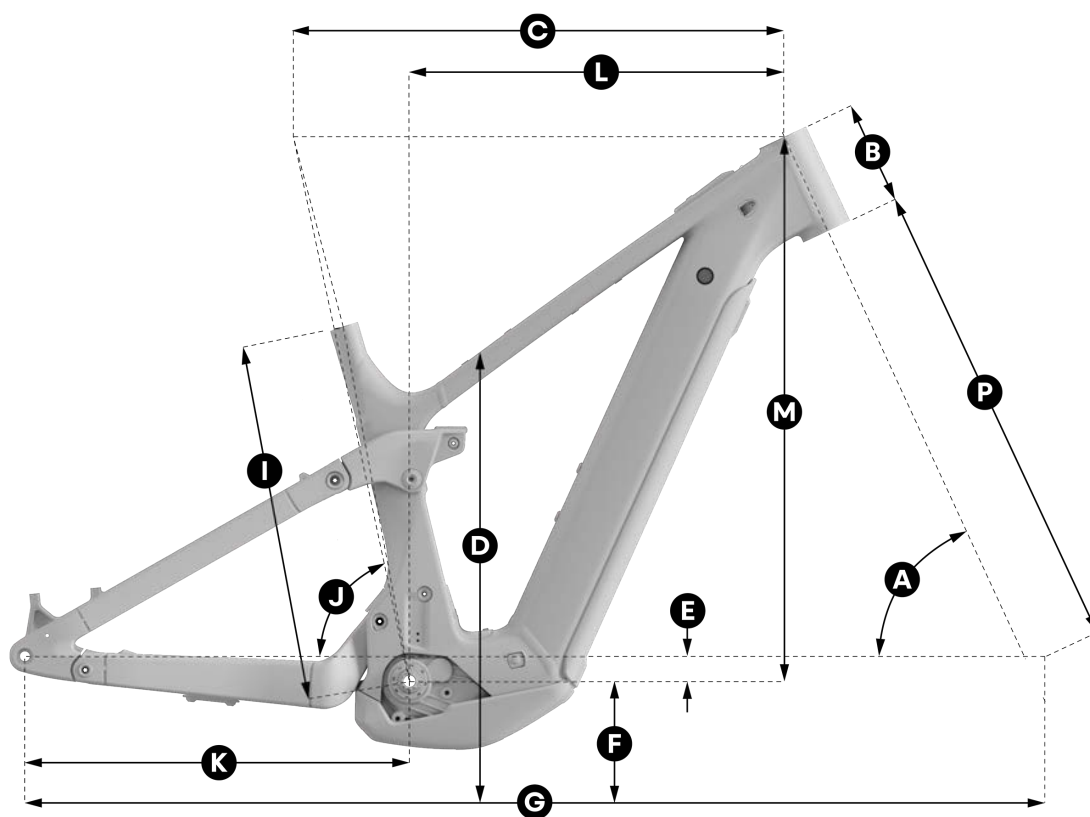

2027 STRIKE			SMALL	MED	LARGE	XL
A	Head tube angle	°	64.8	64.8	64.8	64.8
B	Head tube length	mm	123	125	135	145
C	Top tube horizontal	mm	577	600	630	665
D	Standover height	mm	759	757	756	754
E	BB offset	mm	-30	-30	-30	-30
F	BB height	mm	350	350	350	350
G	Wheelbase	mm	1236	1257	1286	1320
I	BB center to TST	mm	415	435	470	500
J	Seat angle	°	77	77	77	77
K	Chainstay	mm	465	465	465	465
L	Reach	mm	430	450	475	505
M	Stack	mm	653	655	664	673
	Fork Rake	mm	44	44	44	44
	Trail	mm	130	130	130	130

STRIKE

TECHNICAL DATA

SEATPOST	mm	31.6
SEATPOST CLAMP	mm	34.9
MAX SEATPOST INSERTION	mm	SM: 193 MD: 213 LG: 248 XL: 278
TRAVEL	mm	150 F 150 R
SHOCK LENGTH	mm	185
SHOCK STROKE	mm	55
SHOCK BUSHES DIMENSION	mm	30 x 8
SHOCK BUSH BOTTOM	n/a	Trunnion
HEADSET	mm	Cups: O:62/I:56mm Upper.B O:52/I:42 Lower.B O:52/I:40
REAR AXLE	mm	148 x 12
MAX CHAIN RING		38 tooth
MAX ROTOR REAR	mm	220
MAX ROTOR FRONT	mm	220
MAX TYRE WIDTH	in	2.6
CHAIN LINE	mm	55
BOSCH CONNECT MODULE		NOT COMPATIBLE

STRIKE

INSERTING THE BATTERY / MOUNTING THE BATTERY COVER



Place the battery into the lower battery mounting first, make sure the battery is orientated correctly.



Insert the upper end of the battery into the locking mechanism and press firmly until an audible click is heard. To remove the battery, insert the key and turn it anti-clockwise. The battery will release and move forward slightly. Press the release tab downward and remove the battery completely.



Locate the battery cover in the lower battery cover mount. The cover is retained by integrated magnets.



Push the upper end of the battery cover into the retaining clip until an audible click is heard. To remove the battery cover, pull the release tab outward.

STRIKE


CABLE ROUTING OVERVIEW

The routing of brake hoses, shift cables, drive system wiring, front and rear light cables, and the dropper seatpost cable is a complex procedure. To ensure correct installation and safe operation, seek assistance from an authorised SCOTT dealer.



STRIKE

REAR LIGHT

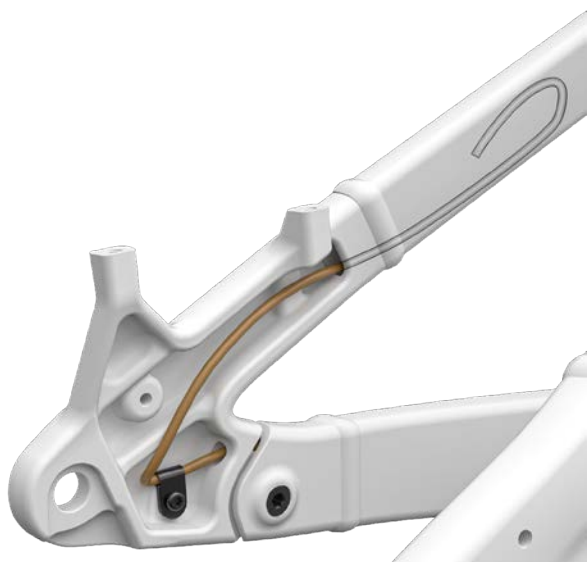


A rear light cable will be installed but not connected, the excess cable will be curled inside the seatstay.



Once purchased, attach the rear light as specified.



Pull the excess cable out from the base of the seatstay, then re-thread the cable so that it exits below the seatstay bridge. Both frame cable and light cable will have stripped ends.

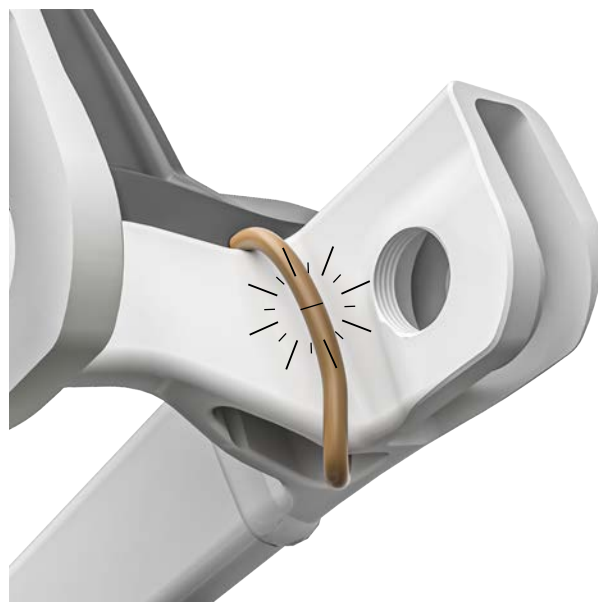

Connect both ends to close the circuit, if you are unsure please consult your SCOTT authorised dealer for assistance.

STRIKE

ADJUSTING THE CHAIN GUIDE



Install the mounting plate, ensuring that the sliding adjustment plate is positioned behind it.



Secure the inner half of the chain guide to the mounting plate using the sliding adjustment plate bolt. Ensure that the spacer, highlighted in yellow, is correctly positioned. Adjust the chain guide to suit the chainring size.



Secure the outer half of the chain guide using the small retaining screw.

STRIKE

SETTING SAG



Ensure that the rubber sag indicator is positioned against the shock body at the base of the inner shaft.



Wearing your usual riding clothing and equipment, gently sit on the saddle without bouncing.



Carefully lift your weight off the saddle and check the position of the sag indicator. For general riding conditions, a sag setting of 20% is recommended.

 If you are not sure or have any queries, please contact your SCOTT Authorised dealer for assistance.

STRIKE

GENERAL SPARE PARTS



421622 SCO CHAINGUIDE RANSOM 24 STRIKE 27



424182 SCO ERIDE FINISHING KIT PATRON 25



428158 SCO ERIDE SHOCK COVER STRIKE 27



428092 SCO ERIDE CABLE GUIDE SET STRIKE 27



STRIKE

GENERAL SPARE PARTS



428691 SCO HEADSET E-VILLE/STRIKE FS 27




428026 BAT COVER STRIKE 27



428094 SCO ERIDE DT CABLE COVER STRIKE 27

STRIKE

GENERAL SPARE PARTS

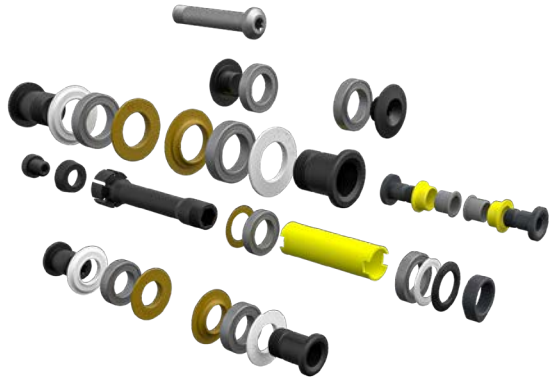

428091 SCO ERIDE SWINGARM REP KIT STRIKE 27



428093 SCO ERIDE LINKAGE RUBBER STRIKE 27



288342 SCO ERIDE REAR LIGHT/FENDER PATRON 22/25



STRIKE

GENERAL SPARE PARTS



424177 SCO ERIDE MOTOR COVER OPTION 7 PATRON 25



296609 SCO AXLE RWS REAR 148X12 GENSCAL PLUG 23



428388 SCO CSP STRIKE 27



286000 SCO DROPOUT SRAM UDH 21



MANUFACTURER'S GUARANTEE,

When purchasing a new SCOTT bicycle from an authorized SCOTT dealer, SCOTT grants a manufacturer's guarantee subject to the following provisions.

CONDITIONS

The manufacturer's guarantee is only granted to the first-time buyer of a SCOTT bicycle who has purchased it from an authorized SCOTT dealer. The manufacturer's guarantee only applies if the bicycle is registered to the first buyer at www.scott-sports.com within one year of purchase.

DURATION

The manufacturer's guarantee is granted from the date of purchase for a period of five years on bicycle frames and rear ends. The guarantee period is reduced to three years, if the SCOTT bicycle is not serviced at least once a year by an authorized SCOTT dealer. Maintenance services must be carried out in accordance with the maintenance instructions in the SCOTT manual and must be confirmed there by the stamp and signature of the authorized SCOTT dealer.

For frames and rear ends of Category 5 bicycle models and for rigid forks manufactured by SCOTT, the duration of the manufacturer's guarantee is limited to two years.

If a defect on the SCOTT bicycle is remedied within the scope of a manufacturer's guarantee or a warranty claim, the duration of the manufacturer's guarantee is not extended. The manufacturer's guarantee ends, when the first-time buyer transfers ownership of the SCOTT bicycle to a third person.

ASSERTION

The manufacturer's guarantee is provided by SCOTT Sports SA, Route du Crochet 11, 1762 Givisiez, Switzerland. The buyer must inspect the SCOTT bicycle immediately after purchase and notify his authorized SCOTT dealer at once in writing of any obvious defects. Hidden defects must be reported immediately after their discovery. In the event of a guarantee claim, the SCOTT bicycle must be handed over to an authorized SCOTT dealer. The latter will contact SCOTT to remedy the defect. The assertion of a guarantee claim always requires the presentation of the original proof of purchase as well as the proof of maintenance service in the SCOTT manual.

Performance of SCOTT in the event of a guarantee claim

In the event of a guarantee claim, SCOTT will, at its own discretion, repair the defect or replace the defective product with a product of similar quality, whereby colour and model deviations are possible. If a repair or replacement is not possible, a purchase price refund will be made taking into account previous use. SCOTT is entitled to commission third parties to remedy the defect.

LIMITATIONS

The manufacturer's guarantee applies exclusively to frames, swingarms and rigid forks of SCOTT bicycles. Bicycle components are excluded from this manufacturer's guarantee.

The manufacturer's guarantee does not apply to normal wear and tear, damage caused by accidents or other excessive force on the SCOTT bicycle, corrosion, improper maintenance, incorrect assembly and assembly of unsuitable components or accessories as well as cosmetic defects, for example in the varnish.

The manufacturer's guarantee does not apply to SCOTT bicycles that have been used in a rental shop.

MISCELLANEOUS

These manufacturer's guarantee provisions apply to all SCOTT bicycles as of model year 2023. Statutory warranty rights of the buyer and guarantees of component manufacturers (Shimano, SRAM etc.) remain unaffected by this manufacturer's guarantee. The place of jurisdiction for all disputes in connection with this manufacturer's guarantee is Freiburg, Switzerland. This manufacturer's guarantee is subject to Swiss law to the exclusion of all legislation that refers to foreign law.

SCOTT		BIKE WARRANTY PERIODS				
		Year 1	Year 2	Year 3	Year 4	Year 5
SCOTT Bikes						
Category 5 Bikes						
Regular Warranty Period						
Option for prolongation according to maintenance intervals shown in manual attached to bikes						

[illegible]



All rights reserved
© 2027 SCOTT Sports SA

Distribution:
SSG (Europe) Distribution Center SA
P.E.D. Zone C1
Rue du Kiell 60
6790 Aubange
Belgium

SCOTT Sports SA
Route du Crochet 11
1762 Givisiez
Switzerland

www.scott-sports.com|contact
www.scott-sports.com



quefairedemesdechets.fr



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

